



Настройка нескольких физических ethernet портов в один логический на примере VMware ESXi Client 6.0 и X460-48p (ExtremeXOS 15.4.1.3).

Каждый физический ethernet порт (vmnic) в VMware ESXi должен быть подключен в X460-48p. Добавляем нужные порты в виртуальный свич (vSwitch)

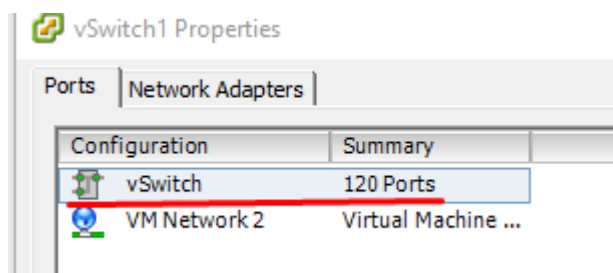

Network Adapter	Speed	Observed IP ranges
vmnic1	1000 Full	172.16.1.128-172.16.1.254
vmnic2	1000 Full	172.16.1.128-172.16.1.254

Выставляем режим работы NIC Teaming в vSwitch

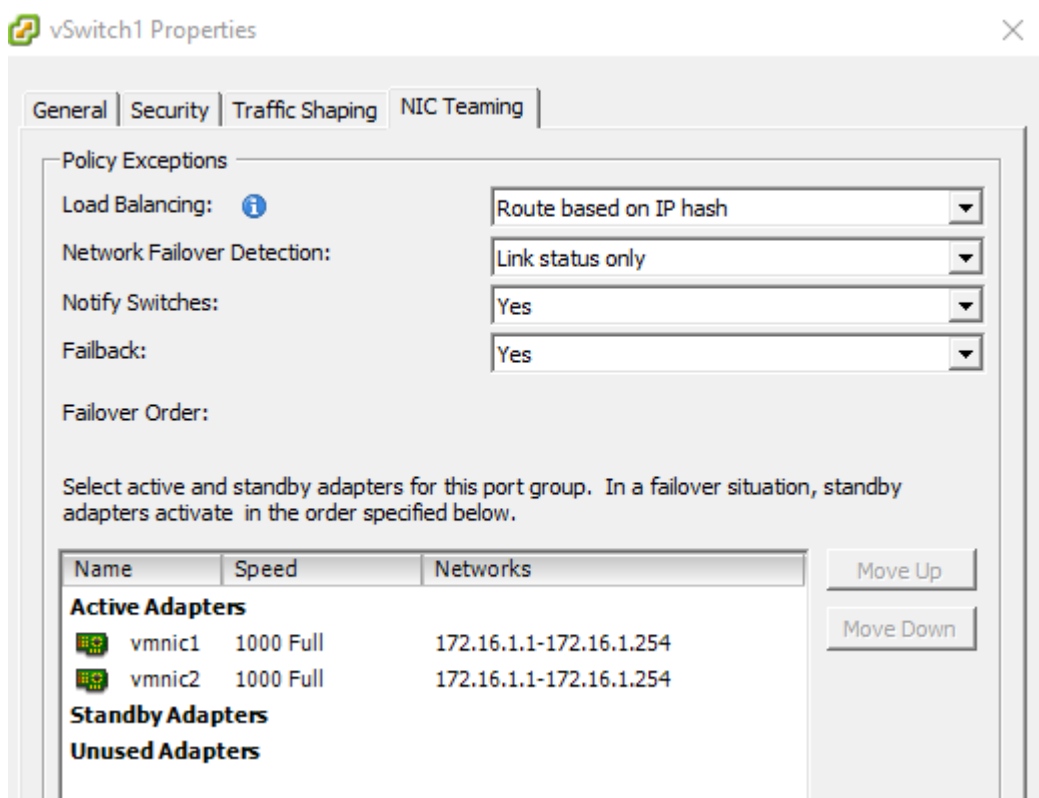

Выясняем на какие порты в X460 подключены vmnic. Подключаемся к X460 (ssh или cli).

Формируем канальную группу из портов подключенных в vSwitch.

enable sharing 34 grouping 34, 36 algorithm address-based custom lacp

31(VMWare_1.47_1)	Em---n---e---fMB---x-	Enabled	Active	Auto(1000)	Auto(Full-Duplex)	On	false	-
32(VMWare_1.47_2)	Em---n---e---fMB---x-	Enabled	Active	Auto(1000)	Auto(Full-Duplex)	On	true	-
33(VMWare_1.30_1)	Em---n---e---fMB---x-	Enabled	Active	Auto(1000)	Auto(Full-Duplex)	On	false	-
34(VMWare_1.30_vmnic2)	Em-lan---e---fMB---x-	Enabled	Active	Auto(1000)	Auto(Full-Duplex)	On	false	34
35(VMWare_1.30_vmnic0)	Em---n---e---fMB---x-	Enabled	Active	Auto(1000)	Auto(Full-Duplex)	On	false	-
36(VMWare_1.30_vmnic1)	Em-lan---e---fMB---x-	Enabled	Active	Auto(1000)	Auto(Full-Duplex)	On	true	34

выставляем поведение портов по умолчанию

configure sharing 34 lacp defaulted-state-action add

Проверяем:

sh lacp lag 34 detail

```
X460-48p.8 # sh lacp lag 34 detail


Lag      Actor      Actor      Partner      Partner      Partner      Agg      Actor
      Sys-Pri  Key        MAC          Sys-Pri      Key        Count    MAC
-----
34              0  0x040a  00:00:00:00:00:00          0  0x0000          2  00:04:96:52:cf:a7

Up              : Yes
Enabled          : Yes
Unack count      : 0
Wait-for-count   : 0
Current timeout  : Long
Activity mode    : Active
Defaulted Action : Add
Receive state    : Enabled
Transmit state   : Enabled
Selected count   : 2
Standby count    : 0
LAG Id flag      : Yes
  S.pri:0        , S.id:00:04:96:52:cf:a7, K:0x040a
  T.pri:0        , T.id:00:00:00:00:00:00, L:0x0000

Port list:

Member      Port      Rx      Sel      Mux      Actor      Partner
Port        Priority  State   Logic    State     Flags      Port
-----
34           0      Defaulted  Selected  Collect-Dist  A-GSCDF-  1034
36           0      Defaulted  Selected  Collect-Dist  A-GSCDF-  1036
=====
Actor Flags: A-Activity, T-Timeout, G-Aggregation, S-Synchronization
              C-Collecting, D-Distributing, F-Defaulted, E-Expired
```

Сохраняем:

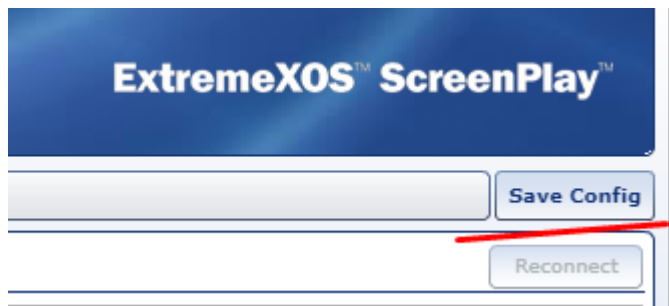

From:
<http://wiki.parus-s.ru/> - ИМЦ Wiki

Permanent link:
http://wiki.parus-s.ru/doku.php?id=%D0%B0%D0%B3%D1%80%D0%B5%D0%B3%D1%80%D0%BE%D0%B2%D0%B0%D0%BD%D0%B8%D0%B5_%D0%BA%D0%B0%D0%BD%D0%B0%D0%BB%D0%BE%D0%B2

Last update: 2019/06/25 09:33

